


# Trash Pumps



Rugged durable range of submersible trash pumps used for pumping water with mud, leaves, twigs, sand, sewage and sludge in it. Used to handle matter that would clog most other pumps. Available in two different flow ranges 20 and 30 litre.

- Greater lift height than suction pumps
- Self priming and run dry
- Unique combi sealed – protects main pump seal
- 5000hrs sealed bearings – minimal maintenance required
- Removable wear plate – protects pump housing

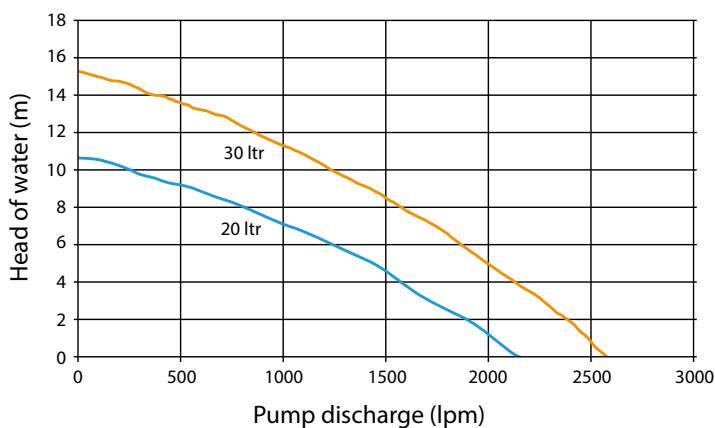

Trash pumps		
Model name	Trash pumps	
Part number	980/A4874	980/A4869
Intake port mm (in)	102 (4)	102 (4)
Discharge port mm (in) BSP Male	100 (4)	100 (4)
Hyd. flow range lpm (UK gal/min)	0-20 (4.4)	0-30 (6.6)
Maximum discharge lpm (UK gal/min)	2160 (570)	2640 (697)
Maximum head m (ft)	10.5 (34.4)	15 (49.2)
Operating pressure bar (psi)	138 (2000)	138 (2000)
Weight kg (lb)	32 (70)	32 (70)
Width x height mm (in)	482x511 (19x20.11)	482x511 (19x20.11)
EHTMA class	C	D

### Hose options

- 929/34317 5m 4" BSP screw on lay flat hose
- 980/90632 10m Cam-loc flat hose (650/10301 required)
- 650/10301 Screw on Cam-Loc male fitting